


### 概述 Summary

- > 单组输出; 功率150W  
Single output: power 150W
- > 输入电压: 90 ~ 132VAC/180 ~ 264VAC 由开关切换  
Input voltage: 90 ~ 132VAC/180 ~ 264VAC by switch

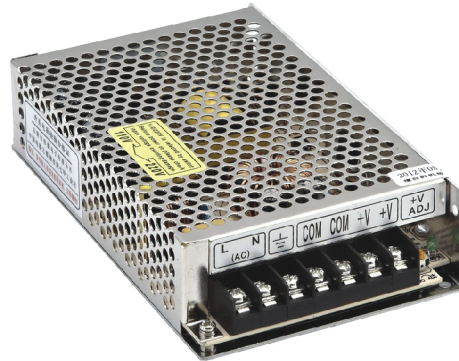

### 常见规格 General Specification

159 × 98 × 38mm

性能 Specification	型号 Model	MS-150-12	MS-150-15	MS-150-24	MS-150-27	MS-150-36	MS-150-48
直流输出电压、电流 DC output voltage, current		12V 0~12.5A	15V 0~10A	24V 0~6.5A	27V 0~5.5A	36V 0~4.17A	48V 0~3.13A
纹波及噪音 Wave and noise		100mVp-p	100mVp-p	100mVp-p	100mVp-p	100mVp-p	100mVp-p
进线稳定度 Inlet wire stability		±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
负载稳定度 Load stability		±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%
效率 Efficiency		83%	84%	86%	86%	86%	86%
直流电压可调范围 Adjustable range for DC voltage		±10%	±10%	±10%	±10%	±10%	±10%
输入电压范围 Input voltage range		90 ~ 132VAC/180 ~ 264VAC 由开关切换 254 ~ 370VDC 47 ~ 63Hz 90 ~ 132VAC/180 ~ 264VAC by switch 254 ~ 370VDC 47 ~ 63Hz					
冲击电流 Impact current		冷启动电流 Cold start current 15A/115VAC 30A/230VAC					
过载保护 Overload protection		105% ~ 150%切断输出, 自动恢复 105% ~ 150% cut off the output, automatic recovery					
过电压保护 Over voltage protection							
启动、上升、保持时间 Setup, rise, hold up time		200ms, 50ms, 20ms/230VAC 满负载 at full load					
耐压性 Withstand voltage		输入输出间: 1.5kV 输入与外壳间: 1.5kV 输出与外壳间: 0.5kV 一分钟 I/P-O/P: 1.5kV I/P-FG: 1.5kV O/P-FG: 0.5kV 1minute					
隔离电阻 Isolation resistance		输入输出间 输入与外壳间 输出与外壳间: 500VDC/100MΩ I/P-O/P I/P-FG O/P-FG: 500VDC/100MΩ					
工作温度 Working temperature		-10°C ~ +50°C					
尺寸 Dimension		159 × 98 × 38mm					
重量 Weight		0.55kg					
包装 Packing		34 × 32 × 24CM/30PCS/16.5kg					

### 外形尺寸 Overall dimension(mm)

